
DATA SPEED S.R.L.
Str. Corneliu Coposu nr. 103, Cluj-Napoca, cod 400235, jud. Cluj
Tel: 0264 566 473, 0735 803 121
office@dataspeed.ro · www.dataspeed.ro

Indicator Cantarire E-Batch1

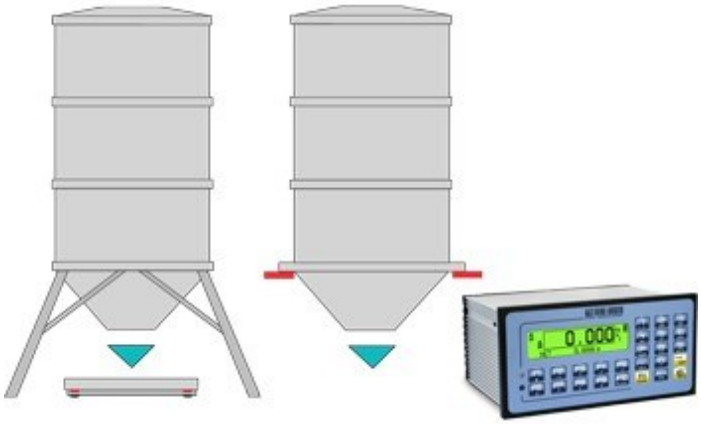

Indicator Cantarire E-Batch1, software pentru 3590E / indicatori CPWE pentru produsul o singură doza sistem. Producator: Dini Argeo.

Descriere

.

- Selectable dosage mode between unloading, automatic or guided manual loading.
- Management of the dosage on various scales (up to 4 independent).
- Management of the production program for dosage up to 4 formulas in sequence, with automatic selection of the following formula and automatic change of the scale.
- Management of the volume flow meter, for dosing in litres.
- Checking of the tare presence at the dosage start; the tare values are programmable for each formula.
- Automatic printing of the dosage data.
- Storage and printing of the consumptions. Printouts may be quickly recalled from the keyboard.
- Automatic correction of the flight weight.
- Repetitions of the programmable dosage cycles; infinite cycle function.
- Tolerance test on the dosed weight, with guided correction on display.
- Check of the maximum dosage time.
- Alarms indication on display.
- Completely programmable printouts, for compatibility with any ASCII printer manageable through the serial port.
- Database of 500 formulas with target, speed change threshold, flight, +/- tolerance, minimum tare and maximum tare values, 2 setpoint values in weight for activation of 2 output.
- Manual programming of the activities and the formulas or throught PC software (Dinitools).
- START / RESTART dosage, PAUSE / RESET cycle and introduction / selection formula.
- Quick switch of the dosage target, through a dedicated key.
- Quick introduction and selection of the dosage data.
- START / RESTART dosage, PAUSE / RESET cycle through external inputs.
- Formula selection through 2 external inputs.
- Dual dosage speed (approximate and fine), through any available contacts or analogue output (optional).
- “Fine” dosage contact active either constantly or intermittently (jogging).
- Input and output with programmable functions.
- Analogue output (optional) proportional to the dosed weight or to the dosage speed.
- Serial communication protocol for programming the formulas, the products and managing the cycle.
- External Profibus interface (optional), for programming the formulas and managing the cycle.
- Bluetooth connection (optional), for quick wireless programming of the activities and the formulas, through PC or PDA.

.

Detalii: