

20 kg ... 2.5 t



Height adjustable rubber foot 52-10 and SB4 load cell

Product Description

Flintec load cell supports are designed to prevent unwanted forces from affecting load cell performance.

The type 52-10 is an height adjustable, self aligning rubber foot; combining excellent load introduction with low profile design. Height adjustable by rotation of the foot.

Especially designed for the SB4, SB5, SB6, SLB, SB9 and SB14 load cells.

Material: steel, zinc plated; alternatively stainless steel.


Key Features

- Blind hole load introduction
- Capacity range: 20 kg to 2500 kg
- Low profile
- Height adjustable by rotation
- Very easy to install
- Especially designed for platform scales
- W&M certified


Available Accessory

- Fixation plate

Examples


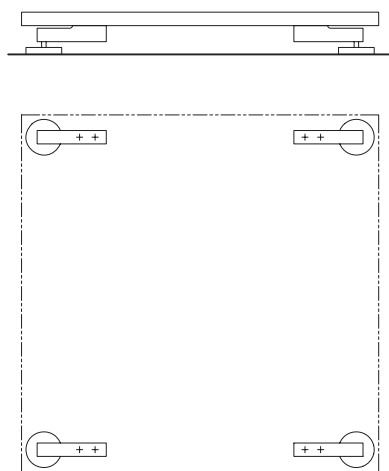


Platform scale with 4 load cells

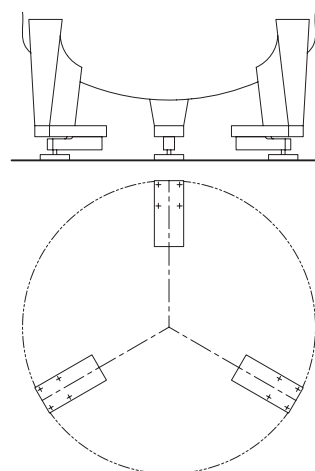

Tank weighing system with 3 load cells
(recommended base plate 52-00 included)

Dimensions (in mm)

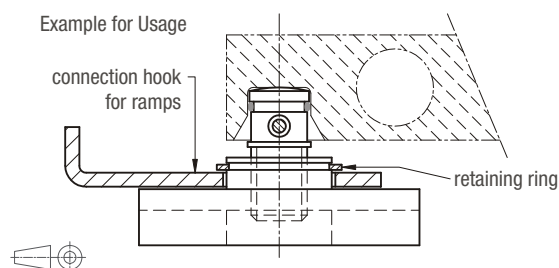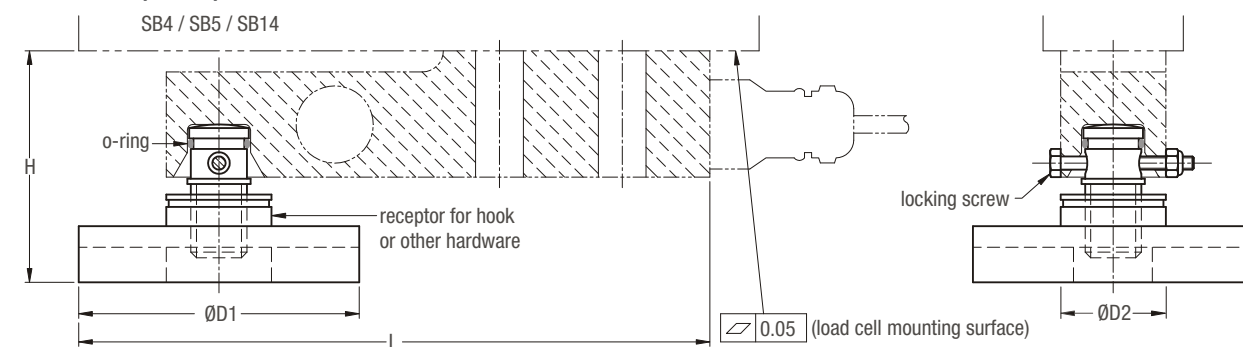


Load Cell Type	Capacity	D1	D2	L	H
SB6	200...500 N (20.4...204 kg)	60	-	150	65...71*
SLB / SB9	200...500 lb (91...227 kg) / 250 kg			154	57...63*
	1...5 klb (454...2268 kg) / 500...2000 kg	80	30	164	59...67*
SB14	0.5...5 klb (227...2268 kg)				58...66 / 60...68*
SB4 / SB5	5...20 kN (510...2039 kg)			180	63...71

* Including spacer.

CAD files for customer's own application drawings are available for download from the Flintec homepage.

Details Type SLB Load Cell

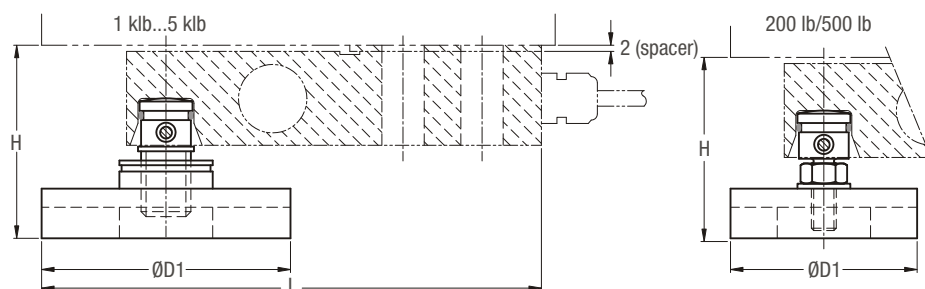

Details Type SB6 Load cell

