
DINI ARGEO
Scales - Weighing systems

ADC16I

"ADC16I": 16bit ANALOGUE INPUT

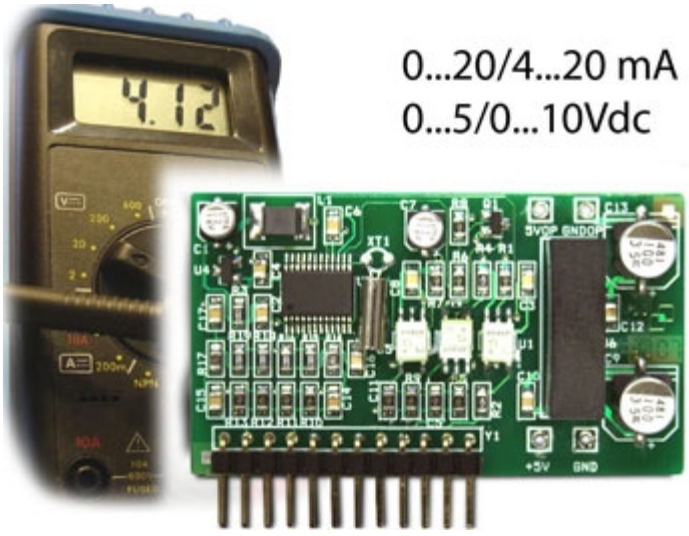

Optoisolated 16 bit analogue input, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the indicator or through the PC with Dinitools. It may be integrated in the indicators for checking the flow and dosage, for remote programming of the setpoint of hourly flow.

Working in cooperation with:

SC DATA SPEED SRL
STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

TECHNICAL FEATURES:

- Reference values for input saimpling programmable from the indicator or from the PC with Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Reading speed: up to 100Hz (depending on the weight indicator).
- Maximum applicable resistance on the input in current: 250 ohm.
- Minimum applicable resistance on the input in voltage: 15 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.
- Available for: CPWEBELT.
- NOTE: this board is an option available only when ordering the weight indicator.

www.diniargeo.com



DINI ARGEO FRANCE sarl
Nogent-sur-Marne

DINI ARGEO GMBH
Sinsheim - Germany

DINI ARGEO UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO WEIGHBRIDGES
Calto (RO) – Italy

DINI ARGEO
Scales - Weighing systems

HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy

ATEX

ISO 9001:2008

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNICAL ASSISTANCE SERVICE