
DINI ARGEO
Scales - Weighing systems

DAC16O

"DAC16O": 16bit ANALOGUE PROGRAMMABLE OUTPUT

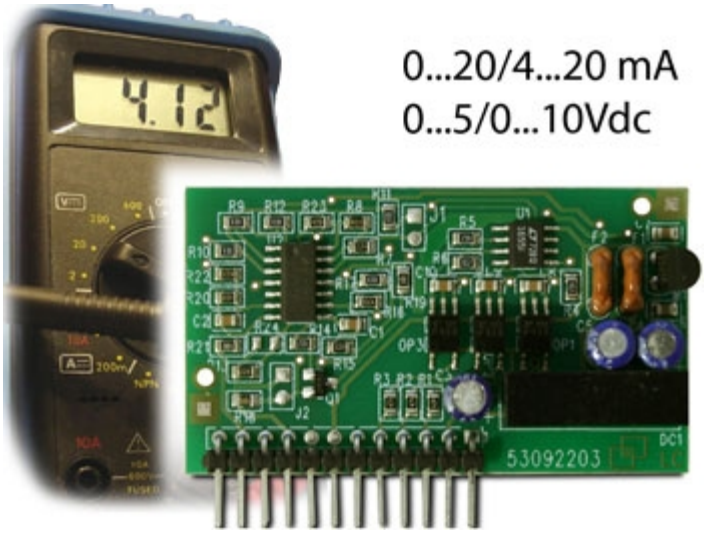

Optoisolated 16 bit analogue output, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the indicator or through the PC with Dinitools. Particularly suitable for use with PLC's and in industrial environments.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

TECHNICAL FEATURES:

- Output values programmable through the indicator or through the PC Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Update frequency: from 30 to 50Hz (depending on the weight indicator).
- Precision: minimum 0,15%, typical 0,08% in relation to the F.S.O. of the analogue output.
- Maximum applicable resistance on the output in current: 350 ohm.
- Minimum applicable resistance on the output in voltage: 10 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.
- NOTE: this board is an option available only when ordering the weight indicator.

www.diniargeo.com



DINI ARGEO FRANCE sarl
Nogent-sur-Marne

DINI ARGEO GMBH
Sinsheim - Germany

DINI ARGEO UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO WEIGHBRIDGES
Calto (RO) – Italy

DINI ARGEO
Scales - Weighing systems

HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy

ATEX

ISO 9001:2008

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNICAL ASSISTANCE SERVICE