

Type HM9C Load Cell



Short description



- Nickel plated alloy steel IP68 dual shear beam load cell
- High accuracy
- Suitable for truck and track scales and other heavy weighing devices
- Hermetically sealed

 OIML test certificate no. D09-06.46

Available models

Capacity	Accuracy	Full article description
10Klb	C3	HM9C-C3-10K-9.3B
20Klb	C3	HM9C-C3-20K-9.3B
30Klb	C3	HM9C-C3-30K-9.3B
40Klb	C3	HM9C-C3-40K-9.3B
50Klb	C3	HM9C-C3-50K-9.3B
60Klb	C3	HM9C-C3-60K-9.3B
75Klb	C3	HM9C-C3-75K-9.3B

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type HM9C Load Cell

Detailed specifications HM9C

Accuracy class		OIML R60 C3
Output sensitivity (= FS)	mV/V	3.0 ± 0.008
Maximum capacity (E _{max})	Klb	5, 10, 20, 30, 40, 50, 60, 75
Max.number of load cell intervals	n _{LC}	3000
Ratio of min. LC verification interval	Y = E _{max} / v _{min}	10000
Combined Error	%FS	≤± 0.0230
Minimum dead load	Of E _{max}	0%
Safe overload	of E _{max}	150 %
Ultimate overload	of E _{max}	300 %
Zero balance	of FS	< ± 1.0 %
Excitation, recommended voltage	V	5 ~ 12
Excitation maximum	V	18
Input resistance	Ω	700 ± 7
Output resistance	Ω	700 ± 7
Insulation resistance	MΩ	≥5000 (at 50VDC)
Compensated temperature	°C	-10 ~ +40
Operating temperature	°C	-35 ~ +65
Storage temperature	°C	-40 ~ +80
Element material		Nickel plated alloy steel
Ingress Protection (acc. to EN 60529)		IP68
ATEX classification (optional)		II1G Ex ia II1C T4 II1D Ex iaD 20 T73°C II3G nL IIC T4

Wiring

Wiring:

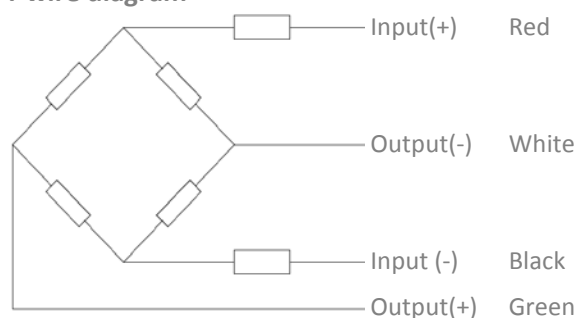
Shielded, 4 conductor cable.

Cable diameter for 5k – 20k: Ø5mm and for 30k – 75k: Ø8mm.

Standard cable length: 9.3m.

Shield not connected to element.


4-wire diagram



Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type HM9C Load Cell

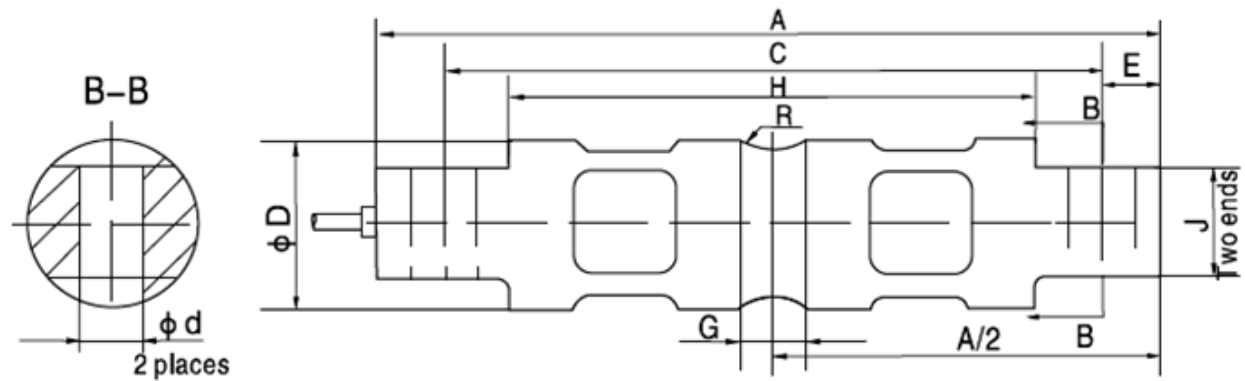Dimensions in mm






Dimension Capacity	A	C	H	G	ØD	J	Ød	R	E
5Klb, 10Klb	206.2	174.6	133.1	15.7	43.2	28.4	16.7	12.7	15.7
15Klb, 20Klb	206.2	174.6	133.1	21.3	49.5	28.4	16.7	12.7	15.7
30Klb-75Klb	260.4	215.9	165.1	25.4	76.2	60.2	26.9	25.4	22.4

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Type HM9C Load Cell

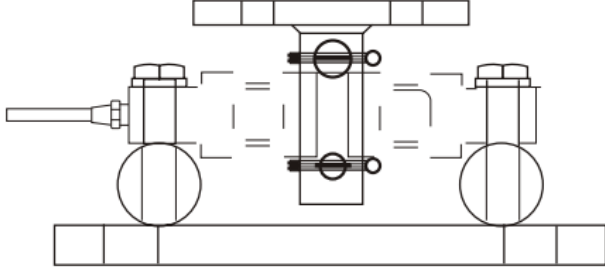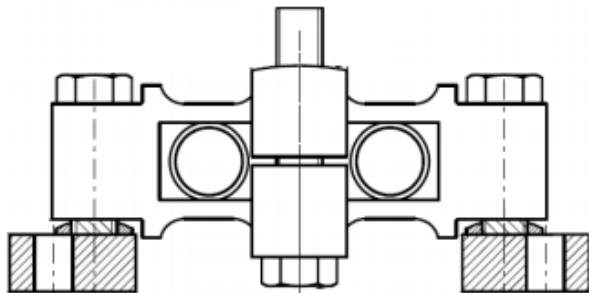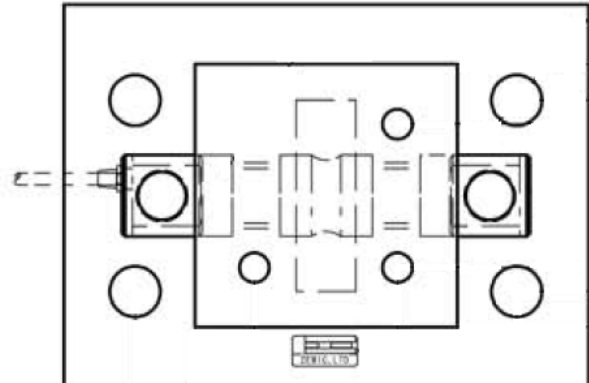Available accessories

HM-9-401-5-250Klb Mount • Easy installation • Compact construction • Anti-reversal ability • Alloy steel • Using under heavy static or slight dynamic load	
HM-9-405-30-75Klb Mount • Alloy steel • No horizontal movement	
HM-9-409-5-20Klb • Easy installation • Compact construction • Anti-reversal ability • Alloy steel • Using under heavy static or slight dynamic load	

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.