Type JB02



Short description

- Fit for 4-wire and 6-wire load cells
- Easy installation
- Cast aluminium housing
- Protective coating

Available models

Model	Amount of connections	Full article description	Part number
JB02	2	JB02C-2	3002010
	3	JB02C-3	3002020
	4	JB02C-4	3002030

Detailed specifications JB02

Load cell output resistance range	Ω	340 to 1100
Load cell input resistance range	Ω	340 to 1100
Excitation, recommended voltage	V(AC&DC)	5 to 20
Excitation, maximum	V(AC&DC)	30
Load cell sensitivity range	mV/V	0.6 – 3
Cable Ø	mm	5 to 6.2
Correction method		Excitation trim
Trimming range	Ω	24
Temperature range, operating	°C	-40…+85
Ingress protection		IP65
Housing connected to shield		Yes
External grounding		No


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl

Type JB02

Dimensions in mm

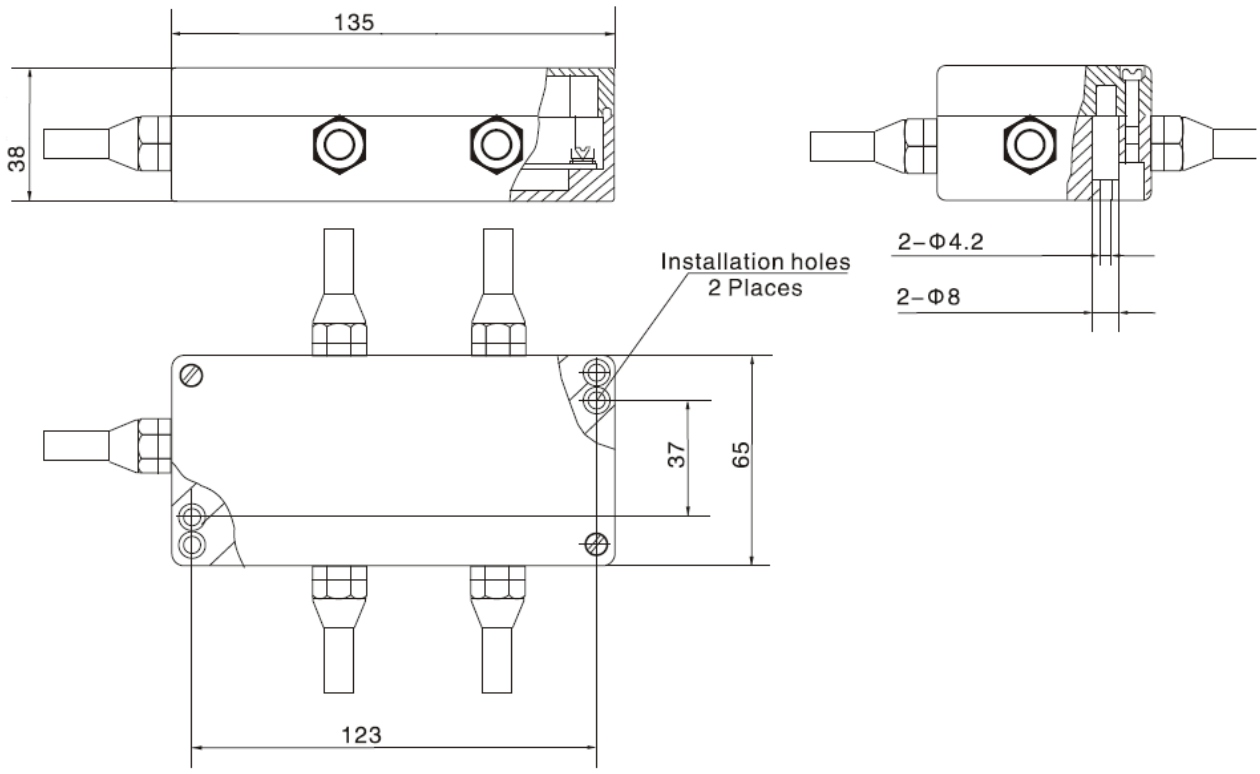

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl