
Type JB-SS304

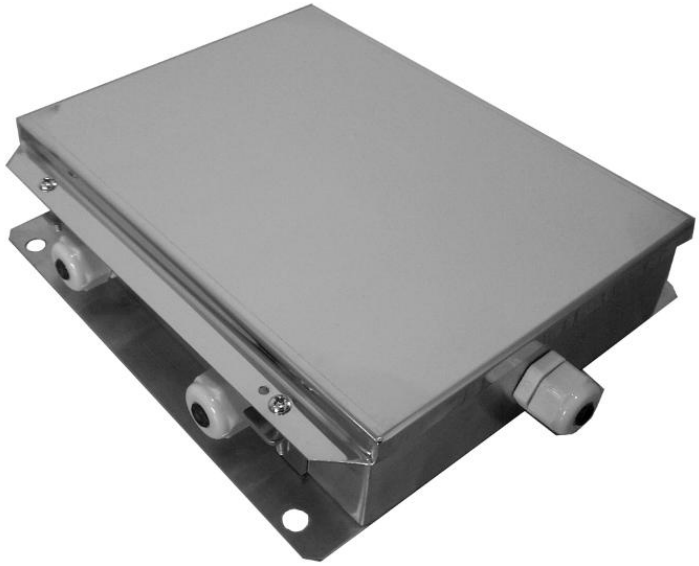

Short description

- Fit for 4-wire load cells
- Easy installation
- Stainless steel housing

Available models

Model	Amount of connections	Full article description	Part number
JB-SS304	2	JB-SS304C-2	3001010
	3	JB-SS304C-3	3001020
	4	JB-SS304C-4	3001030
	6	JB-SS304C-6	3001040
	8	JB-SS304C-8	3001050

Detailed specifications JB-SS304

Load cell output resistance range	Ω	340 to 1100
Load cell input resistance range	Ω	340 to 1100
Excitation, recommended voltage	V(AC&DC)	5 to 15
Excitation, maximum	V(AC&DC)	20
Load cell sensitivity range	mV/V	0.6 – 3
Cable Ø	mm	5 to 6.2
Correction method		Excitation trim
Trimming range	Ω	20 (±10)
Temperature range, operating	°C	-40…+85
Ingress protection		IP65
Housing connected to shield		No
External grounding		No


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl

Type JB-SS304

Dimensions in mm

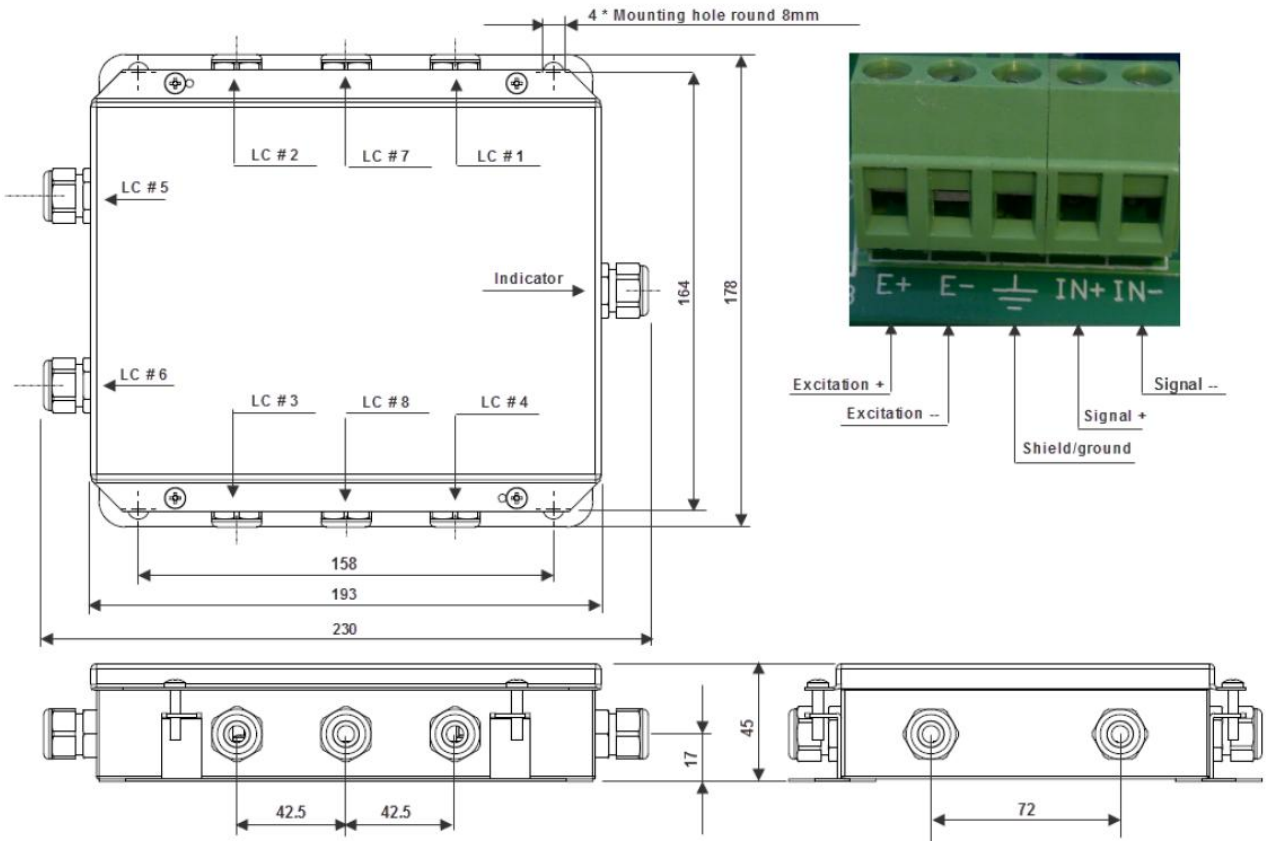

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl