

PS.X2 PRECISION BALANCES



release date 22-04-2015



The **PS.X2 series** represents a **new advanced level** for precision balances.

The X2 series balances feature the latest generation capacitive display providing the maximum comfort of use, available right at your fingertips. Ease of operation, clear menu and practical arrangement of the display guarantee the best ergonomics for your everyday tasks. A wide array of available interfaces facilitate selection of the most optimal means for communication. The X2 series balances offer unlimited possibilities for cooperation with external devices, providing printing, copying, archiving and data transfer. Built-in IR sensors allow numerous operations (e.g. tarring, transmitting the result to a printer or selecting successive steps of a particular process, etc.) to be performed hands-free, by simply moving a hand across the sensor. The housing is made of plastic, and the pan is made of stainless steel.

The balances feature under-pan weighing option - the weighed load is suspended under the balance.

DATABASES IN X2 SERIES BALANCES

In new PS.X2 series balances the information system is based on 8 databases, which allows for several users to work with several products databases, and the registered weighing results can be subject to further analysis.

The data is registered in 8 databases:

- Users (up to 100 users),
- Products (up to 5 000 products),
- Weighments (up to 10 000 weighments),
- Packaging (up to 100 packaging types),
- Formulas (up to 100 formulas),
- Clients (up to 100 clients),
- Pipettes (up to 500 pipettes),
- ALIBI memory (up to 500 000 weighments).

The X2 series features option of making reports of 3 different categories:

- Reports on formulas (up to 200 reports),
- Reports on density determination (up to 500 reports),
- Reports on pipettes calibration (up to 500 reports).

ALIBI Memory

The X2 series balances feature ALIBI memory that is a warranty for safety and automatic recording of your measurements. Options such as data preview, copying and archiving are available to users, as well. The used ALIBI memory allows to record up to 500 000 weighing records.

Personalization taken to the next level


The X2 is the only balance available on the market that provides a user with the option to design display using wide selection of widgets. Customised display of X2 series offers direct access to the results of your work and other important information directly from the home screen.

Weighing Data Management

USB interface facilitates quick transfer and copying of any results of your work (measurements, reports, databases) to other balances. Managing the databases of balances may be also carried out over network thanks to E2R system also offering the possibility of remote control. Network management of the weighing data increases effectivity, productivity and safety of the important data to the maximum.

- Parts counting
- Dosing
- Checkweighing
- Formulation
- Percent deviations
- Statistics
- Animal weighing
- Pipettes calibration
- Autotest (GLP, Filter)
- Density determination
- GLP procedures
- Under hook weighing
- Peak hold
- Infrared sensors
- Ambient conditions monitoring
- Newton unit measurement
- Replaceable units
- ALIBI Memory
- Mass for titrator

Dimensions:

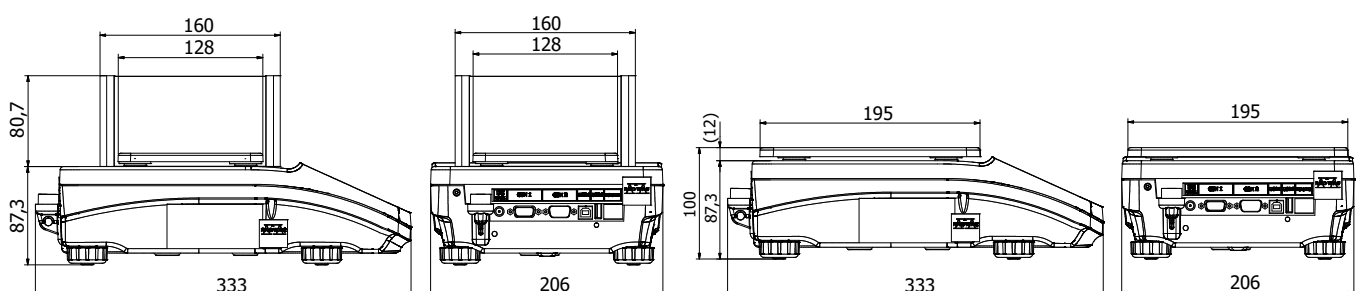

Technical specification:

	PS 200/2000.X2	PS 210.X2	PS 360.X2	PS 600.X2	PS 750.X2	PS 1000.X2
	-	-	-	-	-	-
Max capacity	200 / 2000 g	210 g	360 g	600 g	750 g	1000 g
Minimum load	20 mg	20 mg	20 mg	20 mg	20 mg	20 mg
Readability	1 / 10 mg	1 mg	1 mg	1 mg	1 mg	1 mg
Tare range	-2000 g	-210 g	-360 g	-600 g	-750 g	-1000 g
Repeatability *	1 / 10 mg	1 mg	1 mg	1 mg	1,5 mg	1,5 mg
Linearity	±2 / ±20 mg	±2 mg	±2 mg	±3 mg	±3 mg	±3 mg
Pan size	128×128 mm					
Working temperature	+10 ÷ +40 °C					
Stabilization time	2 s / 1,5 s	2 s				
Sensitivity drift	2 ppm/°C in temperature +10 ÷ +40 °C					
Interface	2 × RS 232, USB-A, USB-B, Ethernet, WiFi - option					
Power supply**	12 ÷ 16 V DC / 2,1 A					
Adjustment/calibration	internal (automatic)					
Display	5" colour capacitive touchscreen					
Net weight/Gross weight	3,5 / 5,5 kg	3,5 / 5,5 kg	3,5 / 5,5 kg	3,5 / 5,5 kg	3,5 / 5,5 kg	3,5 / 5,5 kg
Packaging size	470×380×336 mm					

Technical specification:

	PS 1200.X2	PS 2100.X2	PS 3500.X2	PS 4500.X2	PS 6000.X2	PS 6001.X2
	-	-	-	-	-	-
Max capacity	1200 g	2100 g	3500 g	4500 g	6000 g	6000 g
Minimum load	500 mg	500 mg	500 mg	500 mg	500 mg	500 mg
Readability	10 mg	10 mg	10 mg	10 mg	10 mg	100 mg
Tare range	-1200 g	-2100 g	-3500 g	-4500 g	-6000 g	-6000 g
Repeatability *	10 mg	10 mg	10 mg	10 mg	15 mg	100 mg
Linearity	±20 mg	±20 mg	±20 mg	±20 mg	±30 mg	±100 mg
Pan size	195×195 mm					
Working temperature	+10 ÷ +40 °C					
Stabilization time	1,5 s					
Sensitivity drift	2 ppm/°C in temperature +10 ÷ +40 °C					
Interface	2 × RS 232, USB-A, USB-B, Ethernet, WiFi - option					
Power supply**	12 ÷ 16 V DC / 2,1 A					
Adjustment/calibration	internal (automatic)					
Display	5" colour capacitive touchscreen					
Net weight/Gross weight	3,6 / 5,1 kg	3,6 / 5,1 kg	3,6 / 5,1 kg	3,6 / 5,1 kg	3,6 / 5,1 kg	4,8 / 6,3 kg
Packaging size	470×380×336 mm					

Technical specification:

	PS 1/10.X2	PS 10.X2
	-	-
Max capacity	1 kg / 10 kg	10 kg
Minimum load	-	-
Readability	0,01 g / 0,1 g	0,1 g
Tare range	-10 kg	-10 kg
Repeatability *	0,015 g / 0,05 g	0,05 g
Linearity	±0,03 g / ±0,3 g	±0,3 g
Pan size	195×195 mm	
Working temperature	+10 ÷ +40 °C	
Stabilization time	1,5 s	
Sensitivity drift	2 ppm/°C in temperature +10 ÷ +40 °C	
Interface	2 × RS 232, USB-A, USB-B, Ethernet, WiFi - option	
Power supply**	12 ÷ 16 V DC / 2,1 A	
Adjustment/calibration	internal (automatic)	
Display	5" colour capacitive touchscreen	
Net weight/Gross weight	2,2 kg / 3,8 kg	2,2 kg / 3,8 kg
Packaging size	470×380×336 mm	

* Repeatability is expressed as a standard deviation from 10 weighing cycles.

** 250 mA for balances without WiFi module, 450 mA for balances with installed WiFi module

Accessories:

Antivibration table for laboratory balances	Bar code scanner USB HID
Antivibration table SAL/STONE	Power loop output AP2-1 (plastic housing)
Impact printer Epson	Additional LCD display "WD-6"
Label printer Citizen	Power adapter with battery and charger ZR-02
Printer USB PCL	Mass standard
Density determination kit	Draft shield (for balances featuring 128x128 weighing pan)
Rack for under hook weighing	USB A- USB B cable (balance - computer, balance - PLC printer)
"Tare" or "Print" foot button	Cable RS 232 (scale - computer) "P0108"
PC keyboard USB	Cable RS 232 (scale, Epson, Citizen printer) "P0151"
External USB memory (FAT files format)	"PW-WIN" computer software
Bar code scanner	"RAD-KEY" computer software