
DINI ARGEO
Scales - Weighing systems

ELP

ELP SERIES LOW PROFILE FLOOR SCALES

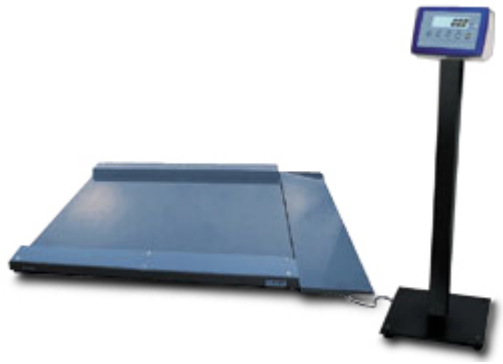

Easy to use and clean, low profile multipurpose scales, are especially suitable for weighing carts, pallet truck scales, and wherever one does not want to install a standard flush floor platform. Manufactured according to OIML R-76 / EN 45501 standards. Available also CE-M APPROVED.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

MAIN FEATURES

- 5-key functional waterproof keypad.
- 25mm LCD backlit display with 6 high contrast digits with icons indicating the active functions.
- Easy to clean ABS waterproof IP65 enclosure built to withstand harsh treatment and corrosive environments.
- Functions with 4 shear-beam IP67 load cells.
- Hermetic IP67 junction box.
- Carbon sheet steel bearing structure, oven-fire painted in RAL 5007 blue. Fitted with adjustable feet and level.
- Loading surface 45 mm high. Equipped with an on/off ramp (a second ramp is optional).
- Digital calibration and set-up through keyboard or PC with DINITOOLS.
- Built-in rechargeable battery and internal 110-240 Vac power adapter.
- THE STAINLESS STEEL MODEL HAS A STRUCTURE AND LOADING SURFACE IN AISI304 AND IP68 STAINLESS STEEL LOAD CELLS.

SELECTABLE FUNCTIONS

- High Resolution Weighing x 10
- Net/Gross or lb/kg conversion
- Accumulation
- Formula weighing
- +/- Checkweighing
- Percentage weighing
- Counting (Max. resolution of 1.500.000 divisions)
- In/Out Truck weighing
- Hold and Peak
- Peer-to-peer (up to 4 remote connectable indicators)

I/O SECTION

- RS232/C port configurable for connection with printer/labeller, or for attached printer.
- RS232/C bi-directional port configurable for PC, PLC, remote display, and radio modem
- Quick RJ RS232 plug connection
- IR input for remote control

KEYBOARD AND PRINTING FUNCTIONS

- KEYBOARD: Zeroing, Automatic tare, Presettable tare, printing and/or data transmission, selectable function command, on/off switching.
- PRINTING: Configurable print layout with:
  - 4 heading lines (with DINITOOLS)
  - Gross-Tare-Net and ticket number
  - Date and time (only with DFCLK)
  - Print of barcode 39.


OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- Thermal printer Option Box
- Time / Date
- Infrared or 433MHz radiofrequency remote control
- CE-M approved models: 3000 divisions or dual range 3000+3000 divisions.


AVAILABLE FUNCTIONS FROM REMOTE CONTROL

- Infrared 19-key remote control: zero, tare / manual tare, enable / disable function, print, switch-off.
- Radiofrequency 6-key remote control: zero, tare, enable / disable function, print, switch-off.

DETAIL 1

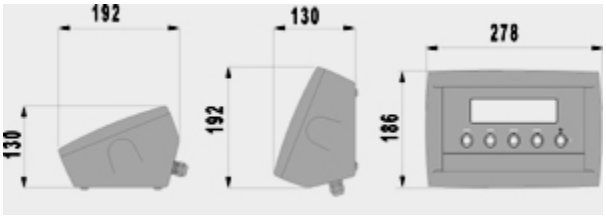

DETAIL 2

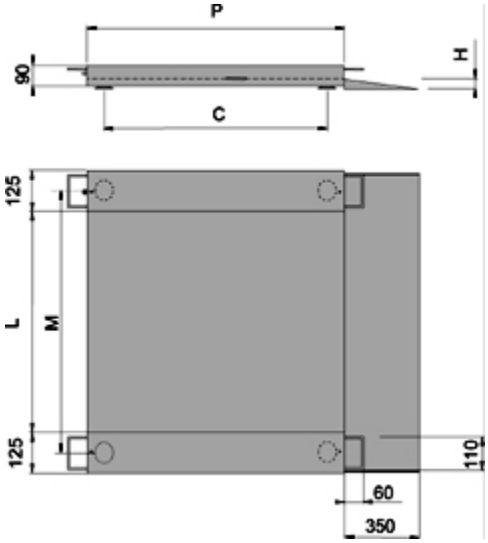

Mod./Dim.	L	P	H	M	C
LPE	1000	1250	45	1130	1070
LPF	1250	1500	45	1380	1380

Dimensions in mm

VERSIONS

Available versions

Code	l x w x h (mm)	Max (kg)	d (g)	CE-M* 3000e (g)	CE-M* 2x3000e (g)	d* HR (g)
ELPE6	1000x1250x45	600	100	200	100-200	50
ELPE15	1000x1250x45	1500	200	500	200-500	100
ELPF6	1250x1500x45	600	100	200	100-200	50
ELPF15	1250x1500x45	1500	200	500	200-500	100
ELPEI6 INOX	1000x1250x45	600	100	200	100-200	50
ELPEI15 INOX	1000x1250x45	1500	200	500	200-500	100
ELPFI6 INOX	1250x1500x45	600	100	200	100-200	50
ELPFI15 INOX	1250x1500x45	1500	200	500	200-500	100

(*) These divisions are obtainable only with the relative options

www.diniargeo.com



DINI ARGEO FRANCE sarl
Nogent-sur-Marne

DINI ARGEO GMBH
Sinsheim - Germany

DINI ARGEO UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO WEIGHBRIDGES
Calto (RO) – Italy

DINI ARGEO
Scales - Weighing systems

HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy

ISO 9001:2008

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNCAL ASSISTANCE SERVICE