

THE QUEEN'S AWARDS FOR ENTERPRISE 2009

T24-ACM

Acquisition Connectivity Module

User Manual
www.mantracourt.co.uk

mantracourt

Wireless Telemetry Range 2.4Ghz

Introduction / Overview **2**
Getting Started **2**
Connecting Power 2
Connecting Input Signals 2
Specifications **4**
General Radio 4
T24-ACM 4
Approvals **5**
CE 5
FCC 5
Industry Canada 6
OEM / Reseller Marking and Documentation Requirements **6**
FCC 6
IC 6
CE 6
Declaration of Conformity **8**
Worldwide Regional Approvals **9**
Important Note 9
Warranty **9**

Introduction / Overview


The T24-ACM provides a convenient way to provide power and connect to one of the range of T24 acquisition modules.
The connectivity module provides a battery holder for a pair of alkaline 'D' cells and has regulator circuitry for an external power supply. The batteries can also be used to provide power in case of external supply failure.
Connecting an input to the acquisition module is also made easier by utilising 2 part screw terminals. The case is environmentally sealed to IP65.

Getting Started

The T24-ACM requires that the acquisition module is factory fitted therefore this requires specifying at the time of ordering.

Connecting Power

Power can be supplied by fitting 2 X 'D' cell alkaline 1.5 Volt batteries or the module can be supplied from an external 5V to 18V DC source.
In both cases you need to fit the JP1 power jumper to supply power to the acquisition module.
When powered from the external DC source the LED will illuminate.

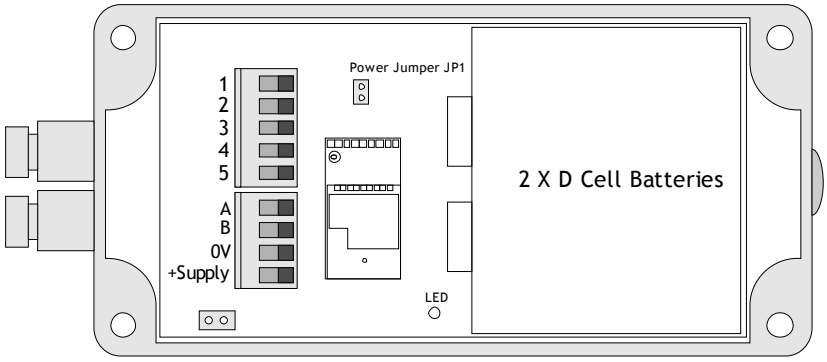

Connecting Input Signals

The connection of the input signals is dependent on what type of acquisition module is fitted. Please refer to the table below. There may be additional input wiring requirements so please refer to the acquisition module manual.

Acquisition Module	Screw Terminal	Function
T24-ACM-SA, T24-ACM-SAF	1	+5V Excitation
	2	+Signal
	3	-Signal
	4	-Excitation
	5	Shield
	A	
	B	

Acquisition Module	Screw Terminal	Function
T24-ACM-VA Voltage Input (0-10V)	1	+5V Excitation
	2	+V
	3	-V
	4	-Excitation
	5	Shield
	A	
	B	

Acquisition Module	Screw Terminal	Function
T24-ACM-IA Current Input (0-20mA 4-20mA Calibrated)	1	+5V Excitation
	2	+I
	3	-I
	4	-Excitation
	5	Shield
	A	
	B	

Acquisition Module	Screw Terminal	Function
T24-ACM-PA Pulse Input (0.5 – 3,000 Hz)	1	+5V Excitation
	2	Pulse In
	3	Not Connected
	4	-Excitation (GND)
	5	Shield
	A	
	B	

Acquisition Module	Screw Terminal	Function
T24-ACM-RA Potentiometer Input (500 – 100,000 Ohms)	1	+2V5 Excitation
	2	+Input
	3	Not Connected
	4	-Excitation
	5	Shield
	A	
	B	

Acquisition Module	Screw Terminal	Function
T24-ACM-TA PT100 Input (-200 – 500°C)	1	+Drive
	2	+Sense
	3	-Sense
	4	-Drive
	5	Shield
	A	
	B	

Specifications

General Radio

	Min	Typical	Max	Units
License		License Exempt		
Modulation method		MS (QPSK)		
Radio type		Transceiver (2 way)		
Data rate		250		K bits/sec
Radio Frequency	2.4000		2.4835	GHz
Power		1		mw
Range RAD24e (External antenna)			200 (650)	Metres (feet)*
Channels (DSSS)		16		

***** Maximum range achieved in open field site at a height of 3 metres above ground.

T24-ACM

Parameter	Minimum	Typical	Maximum	Units
Battery Supply Voltage	2.1	3	3.6	V DC
External DC Supply	5		18	V DC
Operating Temperature Range	-40	-	85**	°C
Storage Temperature Range	-40	-	85	°C
Reverse polarity Protection		-	-32	V DC
Environmental protection with suitable cables exiting through cable glands.		IP65		

**Batteries used may have reduced operating temperature range.
The specifications for the actual fitted acquisition module are listed in the acquisition module manual.

Approvals

CE

CE

Complies with EMC directive. 2004/108/EC
The Radio Equipment and Telecommunications Terminal Equipment (R&TTE) Directive, 1999/5/EC,

European Community, Switzerland, Norway, Iceland, and Liechtenstein

English:	This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Deutsch:	Dieses Gerät entspricht den grundlegenden Anforderungen und den weiteren entsprecheneden Vorgaben der Richtlinie 1999/5/EU.
Dansk:	Dette udstyr er i overensstemmelse med de væsentlige krav og andre relevante bestemmelser i Directiv 1999/5/EF.
Español:	Este equipo cumple con los requisitos esenciales asi como con otras disposiciones de la Directive 1999/5/EC.
Français:	Cet appareil est conforme aux exigencies essentialles et aux autres dispositions pertinantes de la Directive 1999/5/EC.
Íslenska:	Þessi búnaður samrýmist lögboðnum kröfum og öðrum ákvæðum tilskipunar 1999/5/ESB.
Italiano:	Questo apparato é conforme ai requisiti essenziali ed agli altri principi sanciti dalla Direttiva 1999/5/EC.
Nederlands:	Deze apparatuur voldoet aan de belangrijkste eisen en andere voorzieningen van richtlijn 1999/5/EC.
Norsk:	Dette utstyret er i samsvar med de grunnleggende krav og andre relevante bestemmelser i EU-directiv 1999/5/EC.
Português:	Este equipamento satisfaz os requisitos essenciais e outras provisões da Directiva 1999/5/EC.
Suomalainen:	Tämä laite täyttää direktiivin 1999/5/EY oleelliset vaatimukset ja on siinä asetettujen muidenkin ehtojen mukainen.
Svenska:	Denna utrustning är i överensstämmelse med de väsentliga kraven och andra relevanta bestämmelser i Direktiv 1999/5/EC.

This equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

FCC

FC

Family: RAD24
Models: i and e for internal and external antenna variants. For antenna T24-ANTA and T24-ANTB
FCC ID:VHARAD24
This device complies with Part 15c of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: If the device is changed or modified without permission from Mantracourt Electronics Ltd, the user may void his or her authority to operate the equipment.

Industry Canada

Industry Canada Industrie Canada

Models: i and e for internal and external antenna variants. For antenna T24-ANTA and T24-ANTB
IC:7224A-RAD24
This apparatus complies with RSS-210 - Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment RSS.

OEM / Reseller Marking and Documentation Requirements

FCC

The Original Equipment Manufacturer (OEM) must ensure that FCC labelling requirements are met. This includes a clearly visible label on the outside of the final product enclosure that displays the contents as shown:

> Contains FCC ID:VHARAD24
>
> This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
>
> (1) this device may not cause harmful interference and
>
> (2) this device must accept any interference received, including interference that may cause undesired operation.

The acquisition modules have been tested with T24-ANTA and T24-ANTB. When integrated in OEM products, fixed antennas require installation preventing end-users from replacing them with non-approved antennas. Antennas other than T24-ANTA and T24-ANTB must be tested to comply with FCC Section 15.203 (unique antenna connectors) and Section 15.247 (emissions).

Acquisition modules have been certified by the FCC for use with other products without any further certification (as per FCC section 2.1091). Changes or modifications not expressly approved by Mantracourt could void the user's authority to operate the equipment.

In order to fulfil the certification requirements, the OEM must comply with FCC regulations:
1. The system integrator must ensure that the text on the external label provided with this device is placed on the outside of the final product.
2. The acquisition modules with external antennas may be used only with Approved Antennas that have been tested by mantracourt.

IC

Labelling requirements for Industry Canada are similar to those of the FCC. A clearly visible label on the outside of the final product enclosure must display the following text:

> Contains Model RAD24 Radio (2.4 GHz), IC:7224A-RAD24

Integrator is responsible for its product to comply with RSS-210 - Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment RSS.

CE

The T24 series has been certified for several European countries.
If the acquisition module is incorporated into a product, the manufacturer must ensure compliance of the final product to the European harmonized EMC and low-voltage/safety standards. A Declaration of Conformity must be issued for each of these standards and kept on file as described in Annex II of the R&TTE Directive. Furthermore, the manufacturer must maintain a copy of the T24 device user manual documentation and ensure the final product does not exceed the specified power ratings, antenna specifications, and/or installation requirements as specified in the user manual. If any of these specifications are exceeded in the final product, a submission must be made to a notified body for compliance testing to all required standards.

OEM Labelling Requirements

The 'CE' marking must be affixed to a visible location on the OEM product.



The CE mark shall consist of the initials “CE” taking the following form:

- If the CE marking is reduced or enlarged, the proportions given in the above graduated drawing must be respected.
- The CE marking must have a height of at least 5mm except where this is not possible on account of the nature of the apparatus.
- The CE marking must be affixed visibly, legibly, and indelibly.

Declaration of Conformity

We, **Mantracourt Electronics Limited**
The Drive
Farringdon
Exeter
Devon EX5 2JB
declare under our sole responsibility that our products in the **T24 Radio Telemetry Product Range** to which this declaration relates are in conformity with the appropriate standard EN 300 328 following the provisions of the Radio and Telecommunications Terminal Equipment Directive **1999/5/EC**, **FCC CFR Title 47** part 15c BS EN 61000-4-2 and BS EN 61000-4-3 following the provisions of the EMC Directive **2004/108/EC** and Low Voltage Directive **2006/95/EC**.

December 2007



Brett James
Development Manager
Mantracourt Electronics Limited.

FCC ID:VHARAD24

CE

Worldwide Regional Approvals

Region	Product Conforms To
Europe	CE
USA	FCC
Canada	IC
Australia	To Be Determined
China	To Be Determined
Japan	To Be Determined

Important Note

Mantracourt does not list the entire set of standards that must be met for each country. Mantracourt customers assume full responsibility for learning and meeting the required guidelines for each country in their distribution market. For more information relating to European compliance of an OEM product incorporating the T24 range of modules, contact Mantracourt, or refer to the following web site: **www.ero.dk**

Warranty

All Telemetry products from Mantracourt Electronics Ltd., ('Mantracourt') are warranted against defective material and workmanship for a period of (1) one year from the date of dispatch.
If the 'Mantracourt' product you purchase appears to have a defect in material or workmanship or fails during normal use within the period, please contact your Distributor, who will assist you in resolving the problem. If it is necessary to return the product to 'Mantracourt' please include a note stating name, company, address, phone number and a detailed description of the problem. Also, please indicate if it is a warranty repair.
The sender is responsible for shipping charges, freight insurance and proper packaging to prevent breakage in transit.
'Mantracourt' warranty does not apply to defects resulting from action of the buyer such as mishandling, improper interfacing, operation outside of design limits, improper repair or unauthorised modification.
No other warranties are expressed or implied. 'Mantracourt' specifically disclaims any implied warranties of merchantability or fitness for a specific purpose. The remedies outlined above are the buyer's only remedies. 'Mantracourt' will not be liable for direct, indirect, special, incidental or consequential damages whether based on the contract, tort or other legal theory.
Any corrective maintenance required after the warranty period should be performed by 'Mantracourt' approved personnel only.

THE QUEEN'S AWARDS FOR ENTERPRISE 2009

ISO 9001 REGISTERED FIRM

CE

In the interests of continued product development, Mantracourt Electronics Limited reserves the right to alter product specifications without prior notice.

DESIGNED & MANUFACTURED IN THE UK