
Type BM-9-402

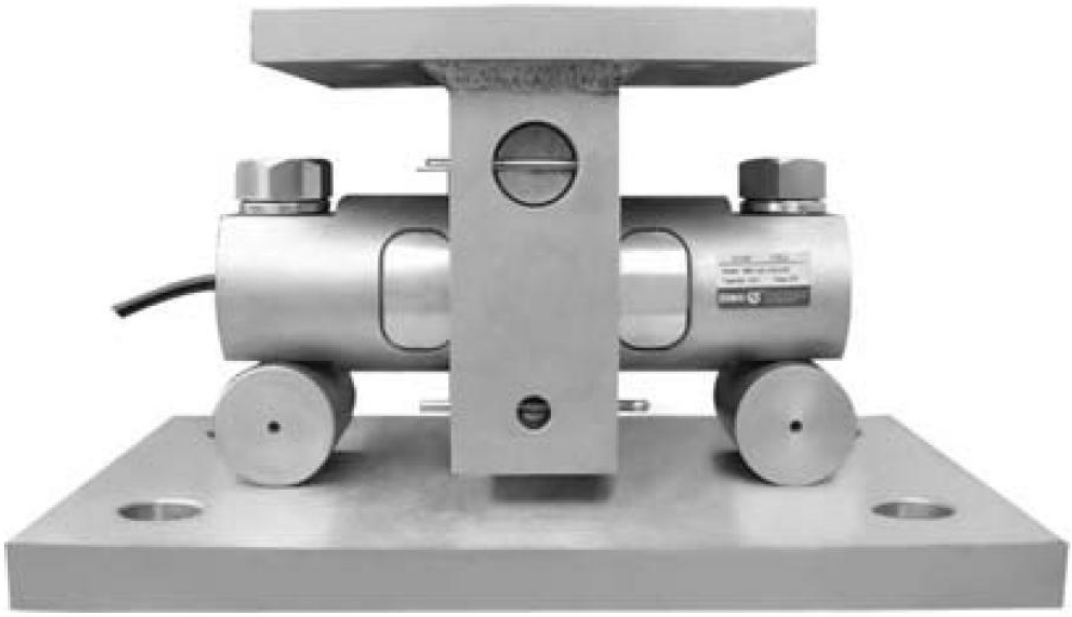

Short description

- Self aligning construction
- Anti-reversal ability
- Stainless steel
- Can be used with Load Cell models: H9C and B9C

Available models

Model	Capacity	Full article description	Part number
BM-9-402	5Klb – 20Klb	BM-9-402-5/20K	2090110
	30Klb – 75Klb	BM-9-402-30/75K	2090120
	100Klb	BM-9-402-100K	2090130
	150Klb	BM-9-402-150K	2090140
	200Klb – 250Klb	BM-9-402-200/250K	2090150

Detailed specifications BM-9-402

Capacity	All Capacities			
Safe overload	150% of Emax			
Maximum overload	300% of Emax			
Maximum anti-rotation	40% of Emax			
Maximum anti-side loading	20% of Emax			
Maximum vertical lifting	5-20K: 3.3K	30-75K: 11K	100-150K: 16.5K	200-250K: 68K


Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl

Type BM-9-402

Dimensions in mm

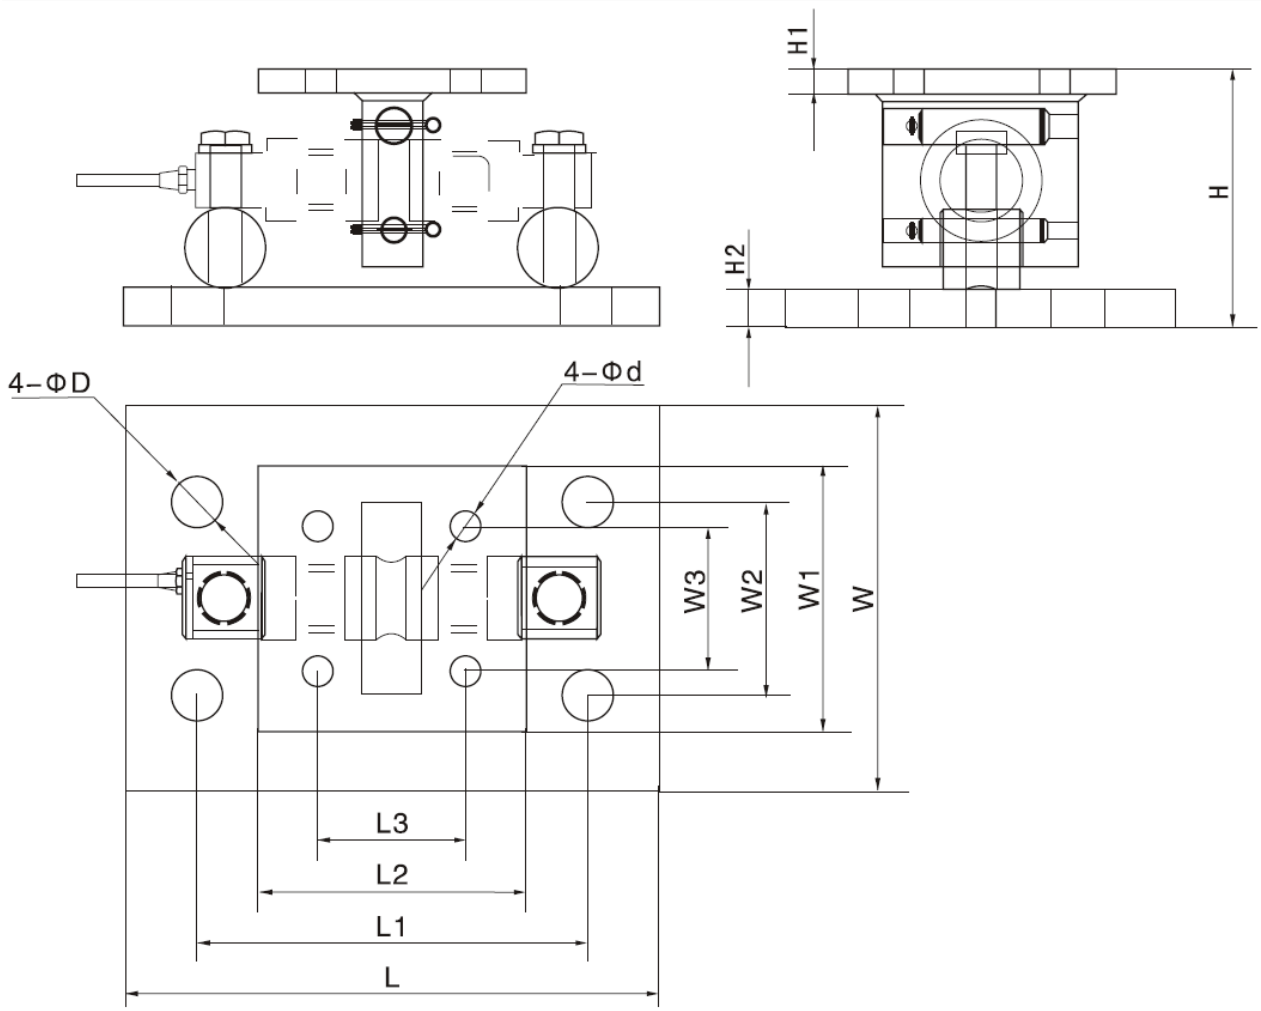

Dimension Capacity	L	L1	L2	L3	W	W1	W2	W3	H	H1	H2	ØD	Ød
5 – 20K	279.4	203.2	139.7	76.2	203.2	139.7	101.6	76.2	139.2	12.7	19	26.9	16
30 – 75K	381	292.1	203.2	130.3	254	203.2	152.4	130.3	214.1	19.1	25	31	19.1
100 – 150K	457.2	355.6	254	190.5	304.8	254	228.6	190.5	246	31.8	31.8	35.1	20.6
200 – 250K	660.4	508	304.8	228.6	304.8	304.8	152.4	228.6	400	50.8	50.8	47.8	26.9

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl