
DINI ARGEO
Scales - Weighing systems

LP

LP SERIES LOW PROFILE PLATFORMS

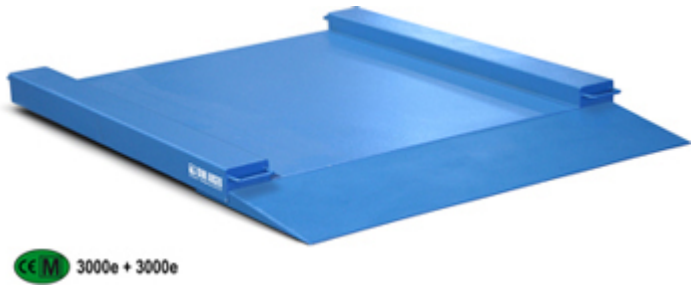

Low profile platforms suitable for weighing trolleys, pallet trucks, etc.; fitted with sideboards and an on/off ramp. Suitable for creating scales and electronic weighing systems for all types of industrial and commercial applications. Standard version is with approved load cell.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ
Tel. 0040-264566473 Fax. 0040-364-815440
office@cantare.com.ro

The best solution
for advanced industrial
applications

MAIN FEATURES

- Fitted with 4 shear-beam OIML approved load cells each with 350 Ohm input resistance with protection against dust
- Moulded sheet-steel structure and loading surface, oven-fire painted RAL 5007 blue.
- Adjustable, shock-proof jointed feet and level.
- 5/15 Vdc power supply.
- Hermetic junction box, IP67 wiring with screened 5m long 6-pin cable with connectors for connection to the indicator.
- Fitted with one on/off ramp.
- THE STAINLESS STEEL MODEL HAS THE STRUCTURE AND MECHANICS IN AISI304, AND IP68 STAINLESS STEEL LOAD CELLS

OPTIONS ONLY AVAILABLE AT TIME OF ORDER


- Connection to the indicator and calibration with CE-M 3000e single range or 3000e+3000e dual range approval (depending on the indicators used).
- High resolution model for internal factory use.

OPTIONS FOR ATEX VERSION

- CCATEX: ATEX certificate for each load cell.
- JB4QA: ATEX certified junction box.
- DCATEXMECH: Declaration of conformity of the whole system composed of PLATFORM + JUNCTION BOX + LOAD CELLS (only if the platform is ordered without the weight indicator; otherwise, refer to the certifications available for the indicator to which it will be connected).

WARNING
With ATEX weighing systems, when directly weighing light metals (such as aluminum, magnesium, titanium and their alloys), it is necessary to use the STAINLESS STEEL version.


DETAIL 1

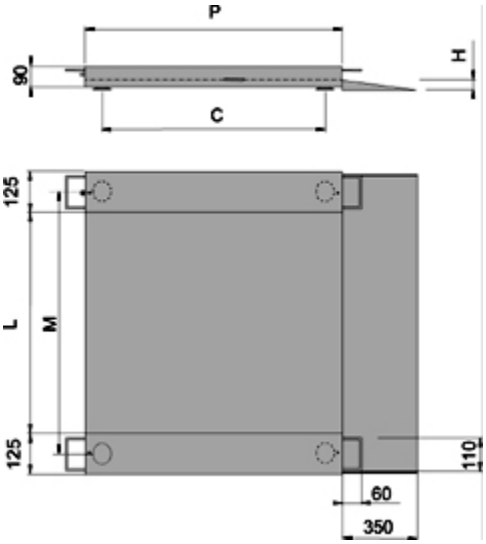

Mod./Dim.	L	P	H	M	C
LPE	1000	1250	45	1130	1070
LPF	1250	1500	45	1380	1380

Dimensions in mm of the loading surface

DETAIL 2

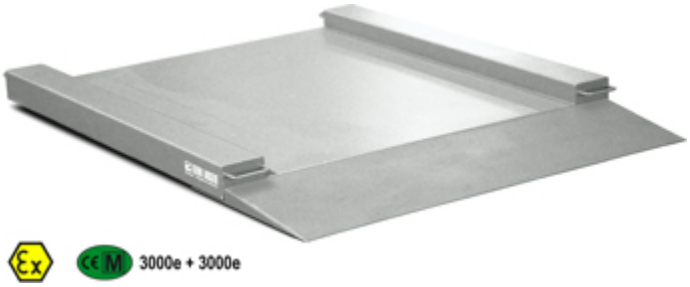

LPI: stainless steel version

VERSIONS

Available versions

Code	l x w x h (mm)	Max (kg)	d (g)	CE-M* 3000e (g)	CE-M* 2x3000e (g)	d* HR (g)
LPE6	1000x1250x45	600	100	200	100-200	50
LPE15	1000x1250x45	1500	200	500	200-500	100
LPF6	1250x1500x45	600	100	200	100-200	50
LPF15	1250x1500x45	1500	200	500	200-500	100
LPEI6 INOX	1000x1250x45	600	100	200	100-200	50
LPEI15 INOX	1000x1250x45	1500	200	500	200-500	100
LPFI6 INOX	1250x1500x45	600	100	200	100-200	50
LPFI15 INOX	1250x1500x45	1500	200	500	200-500	100

(*) These divisions are obtainable only with the relative options

www.diniargeo.com



DINI ARGEO FRANCE sarl
Nogent-sur-Marne

DINI ARGEO GMBH
Sinsheim - Germany

DINI ARGEO UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO WEIGHBRIDGES
Calto (RO) – Italy

DINI ARGEO
Scales - Weighing systems

HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy

ATEX

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNCAL ASSISTANCE SERVICE